

# Attic stairs GutHolz datasheet

Use configurator: [www.massbox.de](http://www.massbox.de)

So far German only. Sorry for the inconvenience.

## Dimensions in centimetres

	Standard sizes				Custom-made
Ceiling opening dimensions (Length x Width)	110 x 60	120 x 60	130 x 60	140 x 60	min. 100 x 50
	110 x 70	120 x 70	130 x 70	140 x 70	max. 160 x 100
Ceiling thickness = casing height	25				17 - 90*
<b>Floor-to-ceiling heights</b> and additional features determine the minimum length of the ceiling opening. Use configurator!					
Floor-to-ceiling height (min. - max.)	197 - 360				

Dimensions are construction site dimensions for **attic stairs GutHolz with thermal protection WS3D**. Divergent dimensions may apply in combination with additional features. Ceiling opening dimensions = order dimensions. For installation space, factory-made casing dimensions are 1.5 cm (length/width) smaller.

\* High casings for thick ceilings are provided with EN compliant additional step/s, e.g. GH WS3D from casing height  $\geq 34$  cm: 1 add. step, from  $\geq 67$  cm: 2 add. steps. For ceiling thicknesses  $< 25$  cm the casing is lowered only at the exit, otherwise keeps the circumferential 25 cm height for safe fixing of the guardrail.

### Frame

19 mm multifunction board, foil-coated, white, suited for load-bearing purposes in moist areas indoors (EN 13986-P5)

### Attic hatch door

19 mm chipboard, melanine resin-coated, white, circumferential ABS furniture edge

### hoka twin-wall-sealing

TPV-profile with two degrees of hardening, lift range of sealing 4 mm, resistant against temperature / environmental influences and ageing, circumferential with groove in the attic hatch fold

### Cover profiles (divergent with ceiling-flush version)

Plastic, white, rounded special profile 40 x 6 mm, on mitre, pre-mounted adhesive tape, plugin-system with corner joints; for custom-made attic stairs 55 mm wide as an option

### Lifting mechanism

Well-engineered lever / spring system balances weight of stairs; even contact pressure for proper closing; ZD latch  
Spring balancer dimensioned for long-time function, mechanical parts endurance tested


### Swivel fitting

For controlling the attic hatch door; not visible when closed, allows cladding up to a thickness of 20 mm and a distributed load of 10 kg/m<sup>2</sup> (hatch door  $\leq 1$  m<sup>2</sup>); request stronger springs for hatch doors  $> 1$  m<sup>2</sup>

### Stairs GutHolz, 3-section folding wooden stairs

Stringers: Solid wood stringboard, thickness 20 x 85 mm; incl. abrasion-resistant 2-component feet covers

Steps: Corrugated, non-slip hardwood steps, depth 9 cm, thickness 17 mm, stair width standard 40 cm,  
Ceiling opening width  $< 60$  cm: stairs 35 cm wide,  
Ceiling opening width  $< 55$  cm: stairs 30 cm wide;  
dovetail joint

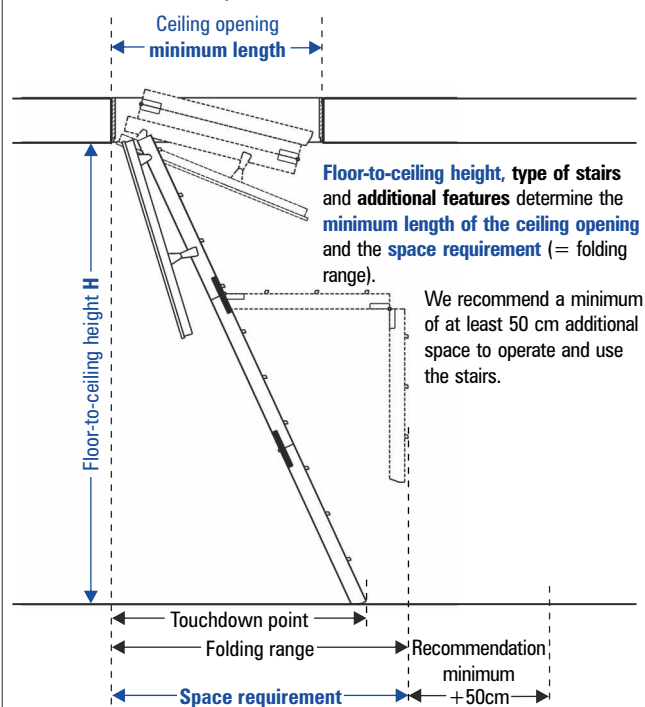

Use configurator: [www.massbox.de](http://www.massbox.de)

So far German only. Sorry for the inconvenience.

### Maintenance

Oil all joints / rotation points and control firm fit of screws annually. Pay attention to humidity at time of installation and when using. A User and Safety Guide is attached to all attic stairs.

**DIN EN 14975** All Wellhöfer attic stairs are manufactured in accordance with DIN-EN and are overload method tested for a load of 150 kg.  
**DIN 3193**

**Endurance tested: 3.000 opening / closing cycles**  
This Wellhöfer test equals 30 years of average usage.



# Attic stairs GutHolz additional features

Use configurator: [www.massbox.de](http://www.massbox.de)

So far German only. Sorry for the inconvenience.

## Energy conservation

### Thermal protection WS3D (as standard)

Material: 48 mm thermodeck insulation  
Ceiling connection system:  
double-sided adhesive sealing tape and insulation braid

Tests: Attic stairs and connection system component tested:  
**WS3D: Insulation value  $U=0.80$  W/(m<sup>2</sup>K)**  
tested, DIN EN ISO 12567-1:2010-12, IBP Fraunhofer Stuttgart  
**Airtightness Class 4 / sealing value  $a=0.01$  m<sup>3</sup>/hm(daPa<sup>2/3</sup>)**  
tested, i. acc. DIN EN 12207 / DIN EN 1026:2016-09, PFB  
**Climate stability Class 3** climate category c/d  
tested, i. acc. DIN EN 12219:2000-06, PFB

incl. WS installation kit (contains all the required materials) and the certified connection system for **airtight installation**

Insulated!  
Air-tight!  
Climate stable!

### Thermal protection WS4D

Material: 96 mm thermodeck double insulation  
Ceiling connection system:  
double-sided adhesive sealing tape and insulation braid

Tests: Attic stairs and connection system component tested:  
**WS4D: Insulation value  $U=0.58$  W/(m<sup>2</sup>K)**  
tested, DIN EN ISO 12567-1:2010-12, IBP Fraunhofer Stuttgart  
**Airtightness Class 4 / sealing value  $a=0.01$  m<sup>3</sup>/hm(daPa<sup>2/3</sup>)**  
tested, i. acc. DIN EN 12207 / DIN EN 1026:2016-09, PFB  
**Climate stability Class 3** climate category c/d  
tested, i. acc. DIN EN 12219:2000-06, PFB

incl. WS installation kit (contains all the required materials) and the certified connection system for **airtight installation**

GutHolz WS4D: Floor-to-ceiling height max. 358 cm with ceiling opening length 150 cm.  
From casing height  $\geq 39$  cm: 1 add. step; from  $\geq 71$  cm: 2 add. steps.

Double insulated!  
Air-tight!  
Climate stable!

### Thermal protection WSPH Passive House

96 mm thermodeck double insulation;  
hoka TPV-profile twin-wall double sealing;  
PH-connection system for certified execution of the installation gap with double faced adhesive airtight sealing tape for connection to the airtight level, insulation braids above and below and thermal pearls

Certificate: Attic stairs incl. PH-connection system  
**Passive house component for cold climate**

Thermal bridge coefficients:

$\Psi=0.05$  W/(mK) in wooden-beam ceiling

$\Psi=0.07$  W/(mK) in concrete ceiling

WSPH: Insulation value  $U_D=0.48$  W/(m<sup>2</sup>K)

certified, Passivhaus-Institut Darmstadt

incl. PH installation kit (contains all the required materials) and the certified PH-connection system

Passive House  
Certificate!

Dimensions in centimetres	GutHolz WSPH
Ceiling opening dimensions (Length x Width)	min. 106 x 55 max. 160 x 80
Ceiling thickness = casing height	25 - 90
Floor-to-ceiling heights	
Floor-to-ceiling height (min. - max.)	197 - 360

Dimensions are construction site dimensions. Divergent dimensions may apply in combination with further additional features.

Ceiling opening dimensions = order dimensions. For installation space, factory-made WSPH casing dimensions are 4 cm (length/width) smaller. Wide cover profiles as standard.

High casings for thick ceilings are provided with EN compliant additional step/s: casing height  $\geq 38$  cm: 1 add. step, from  $\geq 71$  cm: 2 add. steps.

**Floor-to-ceiling height, type of stairs and additional features determine the minimum length of the ceiling opening. Use configurator!**

## Safety

### Guardrail

Solid wood; 4 posts: 32 x 32 mm; 2 triangular supports: 85 x 20 mm; 6 profiled strips: 47 x 20 mm;  
railing height 90 cm; tested stability 500N (DIN 1055)

incl. all required installation materials

Building regulations!

### Handrail GH/SB

Solid wood, 18 x 38 mm, length 74 cm; with very high floor-to-ceiling heights EN compliant 104 cm long version.  
Right, left and double sided possible

User safety!

### Lock

- Deadlock with round cylinder
- Prepared for profile cylinder

## Optics

### Ceiling-flush version

Additional lower cover with a smooth visible side;  
ring eye and sealing disk in white, coated pull hook,  
plastering profiles for on-site plastering

Easy-installation system: detachable hatch door

Solid installation must be ensured on-site.

## Fire protection

See fire protection datasheet

## Flat roof exit

See flat roof exit datasheet



---

For over 20 years, Ecological Building Systems has been at the forefront of environmental and sustainable building products supplying a range of innovative airtightness solutions and natural insulations backed up with expert technical support.

**As product suppliers in the UK and Ireland, we're happy to assist you with your projects and have expert technical and sales advice on hand.**



**Call us**

**Great Britain** +44 (0)1228 711511

**Ireland** +353 46 9432104



**Email us**

[info@ecologicalbuildingsystems.com](mailto:info@ecologicalbuildingsystems.com)



**Find us**

**Great Britain** Ecological Building Systems UK Ltd.,  
Cardewlees, Carlisle, Cumbria, CA5 6LF,  
United Kingdom

**Ireland** Ecological Building Systems Ltd.,  
Main Street, Athboy. Co. Meath, C15 Y678,  
Republic of Ireland