

DeckenTüre



**CLIMATE NEUTRAL
PRODUCT**

certified by fokus-zukunft.com/10014
Currently unavoidable emissions compensated
by climate protection certificates



LOW-EMISSION PRODUCT
according to the criteria of



**SENTINEL HAUS
INSTITUT**

weilhöfer
TREPPEN AUS WÜRZBURG
Made in Germany

For smallest openings

Access hatches are the professional solution

- For ceiling openings from **30 x 30 cm** to **75 x 70 cm** (Length x Width)
- **Maximum clearance** due to detachable door
- With thermal protection WS 3D/4D suitable for **Blower-Door-test**

Standard advantages

- **Low-emission and sustainable product**
Tested and certified by Sentinel Haus
- **Certified climate neutral product**
Currently unavoidable emissions compensated by climate protection certificates
- **Adjustable clip-on hinges**
Easy to remove/insert the door leaf for maximum clearance
- **Furniture quality**
White door surface with all-round ABS edge
- **Rounded mitred cover profiles**
- **15 years manufacturer's guarantee on function**

DeckenTüre



Dimensions in centimetres

Standard sizes	
Ceiling opening dimensions (Length x Width)	50 x 50 60 x 60
Ceiling thickness = frame height	10 (with WS 4D Standard height: 15)
Custom-made	
Ceiling opening dimensions (Length x Width)	min. 30 x 30 max. 75 x 70
Ceiling thickness = frame height	> 10 - 25


Calculate clearance.



Quick and error-free to the fitting access hatch. Use the configurator: www.massbox.de

So far German only. Sorry for the inconvenience. Please use internet browser for translation.

Dimensions are construction site dimensions in centimetres. Ceiling opening dimensions = order dimensions. For installation space, factory-made frame dimensions are 1.5 cm (length/width) smaller. **Clearance** is in width 5 cm and in length 8 cm (when door is unhinged) smaller than the ceiling opening.

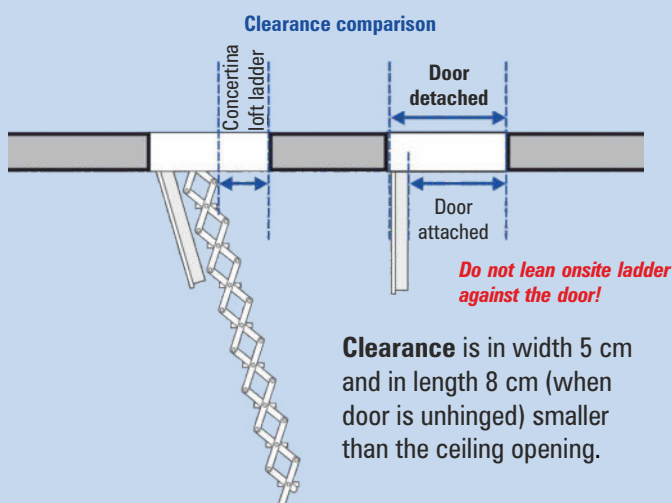

The opening in the ceiling is so small that even a concertina attic stairs no longer fits! A ladder can still be used, but how do you close the hole in the ceiling? **Wellhöfer access hatches are the professional solution.**

Additional features

Energy conservation, safety, optics

- **Thermal protection WS 3D** U-value 0.75
Insulation+sealing+connection system
- **Thermal protection WS 4D** U-value 0.50
Double insulation+sealing+connection system
- **Lock**
- **Wide cover profiles** 55 mm wide, with custom-made

For over 20 years, Ecological Building Systems has been at the forefront of environmental and sustainable building products supplying a range of innovative airtightness solutions and natural insulations backed up with expert technical support.

As product suppliers in the UK and Ireland, we're happy to assist you with your projects and have expert technical and sales advice on hand.



Call us

Great Britain +44 (0)1228 711511

Ireland +353 46 9432104



Email us

info@ecologicalbuildingsystems.com



Find us

Great Britain Ecological Building Systems UK Ltd.,
Cardewlees, Carlisle, Cumbria, CA5 6LF,
United Kingdom

Ireland Ecological Building Systems Ltd.,
Main Street, Athboy. Co. Meath, C15 Y678,
Republic of Ireland