

DeckenTüre Access Hatch - for smallest ceiling openings

Is the ceiling opening so small that even a concertina loft ladder won't fit? There is enough space to position a ladder, but how to close the gap in the ceiling?

Wellhöfer access hatches now provide the professional solution:

- For ceiling openings from **30 x 30 cm to 70 x 70 cm**
- **Maximum clearance** due to detachable door
- With thermal protection WS suitable for **blower door test**
- **Adjustable clip-on hinges**
- Frame is coated in white, with circumferential **twin-wall sealing**
- Rounded **cover profiles on mitre** in plug-in system

■ Frame

18 mm multifunction board, foil-coated, white, suited for load-bearing purposes in moist areas (EN 13986-P5)
2 magnetic catches each with a retention force of 5 kg

■ Access hatch door

16 mm chipboard, melanine resin-coated, white, circumferential ABS furniture edge; smooth surface due to covered quality hinges; ZD latch for even contact pressure and proper closing

■ Quality hinges

Automatic hinges with clipping technology to quickly disconnect/reconnect the door; simple adjustment (length, width, depth) of the door for optimum, tight closing

■ hoka twin-wall-sealing

TPV-profile with two degrees of hardening, lift range of sealing 4 mm, resistant against temperature / environmental influences and ageing, circumferential with groove in the access hatch fold; air-tightness value $a=0.04 \text{ m}^3/\text{hm}(\text{daPa}^{2/3})$

■ Cover profiles

Plastic, white, special profile 40x6 mm, on mitre, pre-mounted adhesive tape, plug-in system with corner joints

■ Thermal protection WS3D

Material: 48 mm polyethylene-thermodeck;
Ceiling connection system for the installation gap: double-sided adhesive sealing tape and insulation braid
Insulation value $U=0.75 \text{ W}/(\text{m}^2\text{K})$
Air-tightness value connection system $a=0.02 \text{ m}^3/\text{hm}(\text{daPa}^{2/3})$
incl. sealing system for air-tight installation

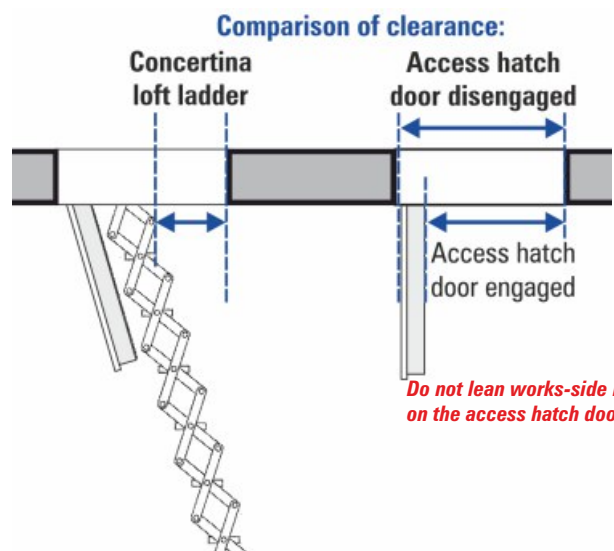


Figure: Access hatch with thermal protection WS3D.

- **Dimensions** of the ceiling opening in cm = ordering dimensions
Casing dimensions (length/width) are 1.5 cm smaller compared to ceiling opening.

	Standard Sizes	Custom-made
Length x Width	50 x 50 60 x 60	min. 30 x 30 max. 70 x 70
Height	10	10 - 25

Clearance with a width of 5 cm and a length of 8 cm (with access hatch door disengaged) less than the ceiling opening.



For over 20 years, Ecological Building Systems has been at the forefront of environmental and sustainable building products supplying a range of innovative airtightness solutions and natural insulations backed up with expert technical support.

As product suppliers in the UK and Ireland, we're happy to assist you with your projects and have expert technical and sales advice on hand.



Call us

Great Britain +44 (0)1228 711511

Ireland +353 46 9432104



Email us

info@ecologicalbuildingsystems.com



Find us

Great Britain Ecological Building Systems UK Ltd.,
Cardewlees, Carlisle, Cumbria, CA5 6LF,
United Kingdom

Ireland Ecological Building Systems Ltd.,
Main Street, Athboy. Co. Meath, C15 Y678,
Republic of Ireland