

DIATHONITE SCREED

Thermal, breathable and light weight screed

Breathable fibre reinforced screed, made out of cork (large. 0-3 mm), clay, diatomaceous powders and hydraulic binder. Natural ready-to-use product, ideal for the realization of light weight thermal screeds, for the insulation of floor slabs, floors and ventilated roofs. Being light weight, *Diathonite Screed* allows to thermally insulate without weighing down the floors and existing structures. *Diathonite Screed* can be used indoors and outdoors, on new buildings and for renovations.

ADVANTAGES

- Insulation against cold and heat.
- Highly breathable.
- Reaction to fire: class A1.
- Lightweight product, suitable for renovations.
- Ready to use.
- Fibre-reinforced.
- It can be used indoor and outdoor.
- Suitable to down piping.
- Product with CE marking (EN 13813).
- After having made the surface waterproof (using a suitable waterproofing product according to EN 14891), the tiles can be attached directly on *Diathonite Screed*.

YIELD

6.00 kg/m² (± 10%) per cm of thickness.

3.12 lb/ft² (± 10%) per inch of thickness.

COLOUR

Grey.

PACKAGING

25 kg (55.10 lb) paper bags.

Pallet: n° 50 paper bags (1250 kg - 2755.8 lb).

APPLICATION FIELDS

Ready-to-use screed for indoor and outdoor applications. Suitable for the construction of thermal screeds for residential buildings, public, hotels, conference rooms and all those environments that need to be isolated with respect to the underlying rooms. It can be used both on

existing floors and on new buildings. The system *Diafon + Diathonite Screed* allows to insulate the floor from noise and vibration.

STORAGE

Store the product in its original and perfectly closed containers, in well ventilated areas, away from sunlight, rain and frost, at temperature above +5°C (41°F). Storage time 12 months.

PREPARATION OF SUPPORT


The substrate must be completely hardened (properly cured) and have sufficient strength. The surface must be thoroughly cleaned, well-established, without friable and inconsistent parts. In the presence of installations, provide a concrete protection.

Brick and concrete

The application can be carried out directly without the aid of a primer. In the presence of hollows or holes on the screed provide restoration with suitable mortar.

Wood and Steel

Given that these kinds of supports are subject to considerable expansion and movement, it will be

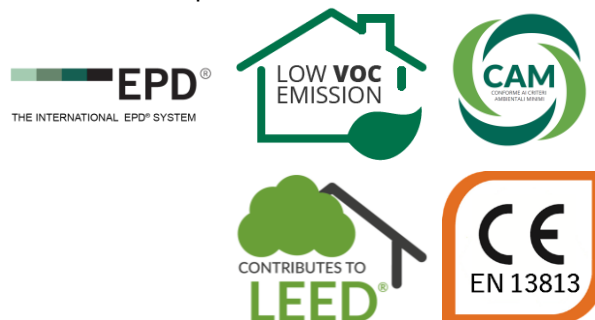

THERMAL AND ACOUSTIC INSULATION – screed

The indications and prescriptions given, while representing our best experience and knowledge, are to be considered indicative and must be confirmed by comprehensive practical applications. Diasen does not know the specificities of the process, let alone the determining characteristics of the application support. Therefore, before using the product, the applicator must in any case carry out preliminary tests, to verify the perfect suitability for the intended use and, in any case, assumes any responsibility that may arise from its use. In case of uncertainties and doubts, please contact the technical office of the company before the start of the work, it being understood that this support is a simple aid for the applicator, which must in any case guarantee the possession of adequate skills and experience for the laying of the product and for the identification of the most appropriate solutions. Always refer to the latest updated version of the data sheet, available on the website www.diasen.com that cancels and replaces each other.

DIATHONITE SCREED

Thermal, breathable and light weight screed

necessary to use galvanized metal reinforcement mesh and the primer *Aquabond* (see technical data sheet).

Panels

For a workmanlike manner, make sure that the panels are well placed together and perfectly anchored to the support. Then proceed directly with the jet of the *Diathonite Screed*. Also, in this case it is necessary to use a galvanized metal mesh electro-welded. For media not present in the technical sheet contact Diasen technical office.

MIXING

Depending upon water absorption of the substrate and environmental conditions, it is recommended to determine the amount of water needed to obtain the correct adhesion. The amount of water indicated on the packaging is merely indicative. Mix the product in a concrete mixer adding 11 L (class S1) – 12.5 L (class S2) (2.91 – 3.30 U.S. gal) of water per bag of *Diathonite Screed* used (25 kg – 55.1 lb). Mix for about 4-5 minutes. It is fundamental not to exceed mixing time. Do not mix the product by hand. Never add external compound to the product.

APPLICATION

Application by hand

1. It is **FUNDAMENTAL** to wet the substrate, particularly during summer time and over screeds exposed to the sun.
2. Prepare the area creating reference bands to obtain the required thicknesses. Reference bands must be created with woods, aluminium or by *Diathonite Screed* itself.
3. In case of the reference bands with *Diathonite Screed*, it should be waited the completed dry of the product. In case of reference bands with wood, remove the bands soon after the application of the last screed coat.
4. It is advisable to position the reference

bands to a maximum distance of 2.5 meters (8.20 ft) from each other.

5. Check the levelling of the reference bands.
6. Lay down *Diathonite Screed* filling the area between the bands.
7. When the screed drowns piping, it will be necessary to use a galvanized metal reinforcement mesh. The minimum thickness of the screed above the piping must be at least 3 cm (1.18 in), and the mesh must be positioned immediately above the piping. Planning a suitable piping covering.
8. *Diathonite Screed* must have a maximum thickness of 5 - 6 cm (1.97 – 2.36 in) in a single layer. For larger thickness apply *Diathonite Screed* in more than one layer.
9. Every following coat must be laid down when the previous coat is compact by touching it as well as lighter by looking at it (after 12/48 hours). Wet the Screed before every coat application.
10. Level the screed with a H straightedge, laying on the bands, making a regular and continuous movement. In the getting smoother phase, do not compress *Diathonite Screed* as per preserve product porosity. As you proceed it is advisable to use a plastic or other material trowel to smooth and compact the surface.
11. For the application on wood, steel supports or panels, it is necessary to use a galvanized metal reinforcement mesh for any thickness of *Diathonite Screed*.

Application with plastering machine

Diathonite Screed can be laid down with plastering machine for light pre-mixed. Machine setting may be changed according to the machine used. It is possible to use plastering machine (as Turbosol Giotto) in three phases, settled only for the pumping without air and, if necessary, with remote control. Other settings are: use of lung, D8 1,5, wide blade mixer, pipe with a diameter of 35 mm (1,38 inch).

1. It is **fundamental** to wet the substrate especially during summer season and over screeds exposed to the sun.

THERMAL AND ACOUSTIC INSULATION – screed

The indications and prescriptions given, while representing our best experience and knowledge, are to be considered indicative and must be confirmed by comprehensive practical applications. Diasen does not know the specificities of the process, let alone the determining characteristics of the application support. Therefore, before using the product, the applicator must in any case carry out preliminary tests, to verify the perfect suitability for the intended use and, in any case, assumes any responsibility that may arise from its use. In case of uncertainties and doubts, please contact the technical office of the company before the start of the work, it being understood that this support is a simple aid for the applicator, which must in any case guarantee the possession of adequate skills and experience for the laying of the product and for the identification of the most appropriate solutions. Always refer to the latest updated version of the data sheet, available on the website www.diasen.com that cancels and replaces each other.

DIATHONITE SCREED

Thermal, breathable and light weight screed

2. Prepare the area creating reference bands to obtain the required thicknesses. Reference bands must be created with woods, aluminium or by *Diathonite Screed* itself.
3. In case of the reference bands with *Diathonite Screed*, it should be waited the completed dry of the product. In case of reference bands with wood, remove the bands soon after the application of the last screed coat.
4. In case the reference points or bands are made out of *Diathonite Screed*, wait for the complete drying of the product. When wooden bands or aluminum profiles are used, remove the bands immediately after the application of the last layer of screed.
5. It is recommended to place these bands at a maximum distance of 2.5 meters.
6. Check the levelling of the bands with a levelling device.
7. Load the contents of the bags inside the hopper and adjust the flow meter of the machine: firstly, set it to **400-600 L/h** to moisten the tube, and then adjust the flow to **300-400 L/h** to proceed with the application.
8. Lay down *Diathonite Screed* filling the area between the bands.
9. When the screed drowns piping, it will be necessary to use a galvanized metal reinforcement mesh. The minimum thickness of the screed above the piping must be at least 3 cm (1.18 in), and the mesh must be positioned immediately above the piping. Plan a suitable piping covering.
10. The thickness and the possible reinforcement of *Diathonite Screed* shall be determined according to the expected loads.
11. The maximum thickness achievable with a single coat is 5/6 cm. For higher thicknesses apply *Diathonite screed* in multiple layers.
12. The following layer must be applied when the underlying layer is consistent to the touch and visually lighter (after about 12/24 hours). Wet the plaster before applying

each layer.

13. Level the screed with a H straightedge, laying on the bands, making a regular and continuous movement. In the getting smoother phase, do not compress *Diathonite Screed* as per preserve product porosity. As you proceed it is advisable to use a plastic or other material trowel to smooth and compact the surface.
14. For the application on wood, steel supports or panels, it is necessary to use a galvanized metal reinforcement mesh for any thickness of *Diathonite Screed*.

Application of **DIATHONITE SCREED** in combination with the insulating mat **DIAFON**

1. Lay *Diafon* mats on the support with the synthetic film facing upwards.
2. Remove the adhesive and seal the mats overlapping them of 10 cm (3.94 in) to realize a continuous soundproofing layer.
3. In the overlapping of the sheets take account of the way of casting of the screed, to prevent the sheets from opening. The surface must be completely covered.
4. *Diafon* can be laid directly above the structural slab or above the screed that covers the piping, before the application of *Diathonite Screed*.
5. *Diafon* must be turned up over the wall to avoid the formation of acoustic bridges between the floor and the structure of the building. The height of the fold must be higher than the finished floor, fold angle must be of 90°. No rounds should be made to avoid the formation of gaps between *Diafon* and slab.
6. The maximum thickness achievable with a single jet is 5/6 cm. For higher thicknesses throw *Diathonite screed* in multiple layers.
7. Lay the floor with ceramic or marble elements or parquet flooring.
8. Trim *Diafon* right above the paved surface.
9. Lay the baseboard, taking care not to weld it (by means of grouting), to the pavement and keep it raised from the surface by about 2 mm (0.079 in). If necessary, the joint between floor and baseboard can always be

THERMAL AND ACOUSTIC INSULATION – screed

The indications and prescriptions given, while representing our best experience and knowledge, are to be considered indicative and must be confirmed by comprehensive practical applications. Diasen does not know the specificities of the process, let alone the determining characteristics of the application support. Therefore, before using the product, the applicator must in any case carry out preliminary tests, to verify the perfect suitability for the intended use and, in any case, assumes any responsibility that may arise from its use. In case of uncertainties and doubts, please contact the technical office of the company before the start of the work, it being understood that this support is a simple aid for the applicator, which must in any case guarantee the possession of adequate skills and experience for the laying of the product and for the identification of the most appropriate solutions. Always refer to the latest updated version of the data sheet, available on the website www.diasen.com that cancels and replaces each other.

DIATHONITE SCREED

Thermal, breathable and light weight screed

closed with elastic material in order to avoid acoustic bridges.

DRYING TIME

At a temperature of 23°C (73.4°F) and relative humidity level of 50%, the product dries in about 28 days if applied with a thickness of 5 cm (1.96 in).

- Drying time is influenced by humidity level and temperature and may significantly change.
- Consider about 7 - 10 days more for each inch of thickness depending on the environmental conditions.
- Protect Diathonite Screed while curing from ice, direct sunlight and wind to avoid future cracks.
- With high temperature, direct sunlight or strong wind it is necessary to wet the plaster even 2/3 times a day for the next 2/3 days after the application.
- Once the application has been completed, to avoid damages before the application of the floor, *Diathonite Screed* must not be subjected to pedestrian traffic or to heavy loads.
- Take care *Diathonite Screed* has completed its drying shrinkage before the laying of the floor, to avoid cracking.
- Ceramic, terracotta or stoneware tiles can be applied directly on *Diathonite Screed*.
- The screed can be coated even with glued parquet after at least 28 days of curing. If *Diathonite Screed* is too rough to lay parquet flooring, smooth the surface with a sanding disks machine and apply *WATstop* (see technical data sheet).
- *WATstop* is recommended when it is necessary to consolidate the surface of *Diathonite Screed* before floor laying.
- *Diathonite Screed* is not suitable to place under floor heating system. In this case, *Diathonite Screed* can be placed below the piping to avoid any thermal dispersion.
- *Diathonite Screed* can be coated with liquid waterproofing or coatings *Diasen* without the use of primers.

SUGGESTIONS

- Environmental and support temperature must be between +5°C and +30°C (+41°F and +95°F).
- During summer season, apply the product during the cooler hours of the day, away from sun.
- Do not apply with imminent threat of rain or frost, in conditions of strong fog or with relative humidity higher than 70%.
- The application time is about 30 - 40 minutes, but it may vary depending on temperature and ventilation.
- Outside it is very important to create suitable dilation joints at regular intervals. Joints must be properly realized to avoid cracks and lesions on the final coat.
- Always keep any existing structural and / or expansion and / or insulation joints on the support.
- In case of reinforcement with electro welded mesh, it is recommended to place it at about half of the total thickness of *Diathonite Screed*, with the help of appropriate spacers, in order to avoid its sinking towards the support.
- Design suitable joints where there are material changes in the support, fixed elements such as pillars, partitions, doors or thresholds, or changes of casting direction.
- For waterproofing the joints use a sealant such as *Diasel Strong* (see technical data sheet).
- In special cases (wide distance between pillars, high loads, etc.), use always galvanized metal reinforcement mesh to reinforce *Diathonite Screed*.

CLEANING

Wash tools with water before product hardening.

SAFETY

While handling, respect the instructions described in product safety data sheet and always use

THERMAL AND ACOUSTIC INSULATION – screed

The indications and prescriptions given, while representing our best experience and knowledge, are to be considered indicative and must be confirmed by comprehensive practical applications. Diasen does not know the specificities of the process, let alone the determining characteristics of the application support. Therefore, before using the product, the applicator must in any case carry out preliminary tests, to verify the perfect suitability for the intended use and, in any case, assumes any responsibility that may arise from its use. In case of uncertainties and doubts, please contact the technical office of the company before the start of the work, it being understood that this support is a simple aid for the applicator, which must in any case guarantee the possession of adequate skills and experience for the laying of the product and for the identification of the most appropriate solutions. Always refer to the latest updated version of the data sheet, available on the website www.diasen.com that cancels and replaces each other.

DIATHONITE SCREED

Thermal, breathable and light weight screed

protective gloves and anti-dust mask.

THERMAL AND ACOUSTIC INSULATION – screed

The indications and prescriptions given, while representing our best experience and knowledge, are to be considered indicative and must be confirmed by comprehensive practical applications. Diasen does not know the specificities of the process, let alone the determining characteristics of the application support. Therefore, before using the product, the applicator must in any case carry out preliminary tests, to verify the perfect suitability for the intended use and, in any case, assumes any responsibility that may arise from its use. In case of uncertainties and doubts, please contact the technical office of the company before the start of the work, it being understood that this support is a simple aid for the applicator, which must in any case guarantee the possession of adequate skills and experience for the laying of the product and for the identification of the most appropriate solutions. Always refer to the latest updated version of the data sheet, available on the website www.diasen.com that cancels and replaces each other.

DIATHONITE SCREED

Thermal, breathable and light weight screed

* The above data, even if carried out according to standard test methods, are indicative and may be subject to changes to the specific site conditions.

Technical data*

| Features | | Units |
|---|---|--------------------|
| Yield | 6.00 ± 10% per cm of thickness | kg/m ² |
| | 3.12 ± 10% per inch of thickness | lb/ft ² |
| Minimum thickness | 4.0 | cm |
| | 1.96 | in |
| Aspect | powder | - |
| Colour | grey | - |
| Grain size | 0 – 3 | mm |
| | 0 – 0.12 | in |
| Density | 600 (±10%) | kg/m ³ |
| | 37.46 (±10%) | lb/ft ³ |
| w/c ratio | 11 – 12.5 L per bag of 25 kg | L/kg |
| | 2.91 – 3.30 U.S. gal per bag of 55.1 lb | gal of U.S./lb |
| Application temperature | +5 / +30 | °C |
| | +41 / +86 | °F |
| Drying time (T=23°C - 73.4°F; R.H. 50%) Thickness 5 cm – 1.97 in | 28 | days |
| Storage | 12 | months |
| Packaging | paper bag 25 kg | kg |
| | paper bag 55.10 lb | lb |

| Final performances* | | Units | Regulations | Result |
|--|-------------------|------------|---------------------------------|--------|
| Thermal conductivity (λ) | 0.060 | W/mK | EN 12667 | - |
| Specific heat (c) | 1000 | J/kgK | EN 1745 | - |
| | 0.239 | kcal/kg °C | EN 10456 | - |
| Attenuation of normalized impact sound pressure level ΔL_w of a system composed by <i>Diafon + Diathonite Screed</i> (5.0 cm - 1.96 in). | $\Delta L_w = 22$ | dB | EN ISO 717-2 | - |
| Footstep insulation index of the system composed by <i>Diathonite Screed</i> (5.0 cm - 1.96 in) + <i>Diafon</i> + hollow – core concrete floor. | $L'_{nw} = 58$ | dB | EN ISO 140-7 DPCM 05.12.1997 | - |

THERMAL AND ACOUSTIC INSULATION – screed

The indications and prescriptions given, while representing our best experience and knowledge, are to be considered indicative and must be confirmed by comprehensive practical applications. Diasen does not know the specificities of the process, let alone the determining characteristics of the application support. Therefore, before using the product, the applicator must in any case carry out preliminary tests, to verify the perfect suitability for the intended use and, in any case, assumes any responsibility that may arise from its use. In case of uncertainties and doubts, please contact the technical office of the company before the start of the work, it being understood that this support is a simple aid for the applicator, which must in any case guarantee the possession of adequate skills and experience for the laying of the product and for the identification of the most appropriate solutions. Always refer to the latest updated version of the data sheet, available on the website www.diasen.com that cancels and replaces each other.

DIATHONITE SCREED

Thermal, breathable and light weight screed

| | | | | |
|--|------------|---------------------|----------------|----|
| Resistance to compression | > 10.0 | N/mm ² | EN 13813 | C7 |
| | 1450.4 | lbf/in ² | - | - |
| Tensile resistance | > 2.0 | N/mm ² | EN 13813 | F2 |
| | > 290.0 | lbf/in ² | - | - |
| Resistance to water vapour diffusion (μ) | class A1 | - | UNI EN 13501-1 | - |
| Fire reaction (class) | 800 (±10%) | kg/m ³ | - | - |
| Bulk density of dry mortar | 800 (±10%) | kg/m ³ | - | - |
| | 50 (±10%) | lb/ft ³ | - | - |

** credits valid only for LEED standard for Schools, LEED for Core & Shell, v. 2009


| LEED® Credits | | |
|--|--|--------------|
| Standard LEED for New Construction & Major Renovation, LEED for Schools, LEED for Core & Shell, v. 2009 | | |
| Thematic | Credit | Points |
| Energy & Atmosphere | EAp2 - Minimum energy performance | mandatory |
| | EAc1 – Optimize Energy Performance | from 1 to 19 |
| Materials & Resources | MRc2- Construction Waste Management | from 1 to 2 |
| | MRc4 – Recycled Content | from 1 to 2 |
| | MRc5 – Regional Materials | from 1 to 2 |
| | MRc6 - Rapidly Renewable Materials | 1 |
| Indoor Environmental Quality | IEQp3 - Minimal Acoustical Performance* | mandatory |
| | IEQc3.2 - Construction Indoor Air Quality Management Plan — Before Occupancy | 1 |
| | IEQc4.1 - Low Emitting Materials - Adhesives and Sealant | 1 |
| | IEQc9 - Enhanced Acoustical Performance* | 1 |
| | IEQc11 - Mold Prevention* | 1 |

THERMAL AND ACOUSTIC INSULATION – screed

The indications and prescriptions given, while representing our best experience and knowledge, are to be considered indicative and must be confirmed by comprehensive practical applications. Diasen does not know the specificities of the process, let alone the determining characteristics of the application support. Therefore, before using the product, the applicator must in any case carry out preliminary tests, to verify the perfect suitability for the intended use and, in any case, assumes any responsibility that may arise from its use. In case of uncertainties and doubts, please contact the technical office of the company before the start of the work, it being understood that this support is a simple aid for the applicator, which must in any case guarantee the possession of adequate skills and experience for the laying of the product and for the identification of the most appropriate solutions. Always refer to the latest updated version of the data sheet, available on the website www.diasen.com that cancels and replaces each other.

DIATHONITE SCREED

Thermal, breathable and light weight screed

| Indoor Air Quality (AIQ) Certification | | |
|--|---|---|
| Evaluation of the results | | |
| Regulation or protocol | Version of regulation or protocol | Conclusion |
| French VOC Regulation | Decree of March 2011 (DEVL1101903D) and Arrêté of April 2011 (DEVL1104875A) modified in February 2012 DEVL1133129A) |  |
| French CMR components | Regulation of April and May 2009 (DEVP0908633A and DEVP0910046A) | Pass |
| Italian CAM Edilizia | Decree 11 October 2017 (GU n.259 del 6-11-2017) | Pass |
| AgBB/ABG | Anforderungen an bauliche Anlagen bezüglich des Gesundheitsschutzes, ABG May 2019, AgBB August 2018 | Pass |
| Belgian Regulation | Royal decree of May 2014 (C-2014/24239) | Pass |
| Indoor Air Comfort® | Indoor Air Comfort 7.0 of May 2020 | Pass |
| Blue Angel (DE-UZ 113) | DE-UZ 113 for "Low-Emission Floor Covering Adhesives and other Installation Materials" (Version January 2019) | Pass |
| BREEAM International | BREEAM International New Construction v2.0 (2016) | Exemplary Level |
| BREEAM® NOR | BREEAM-NOR New Construction v1.2 (2019) | Pass |
| LEED® | "Low-Emitting Material" according to the requirements of LEED v4.1 | Pass |
| CDPH: Classroom scenario | CDPH/EHLB/Standard Method V1.2. (January 2017) | Pass |



THERMAL AND ACOUSTIC INSULATION – screed

Ecological Building Systems

For stockist information and full technical support for your project, please contact Ecological Building Systems or visit www.EcologicalBuildingSystems.com